

**R-9034**

**Anti-Submarine Strap Mount**  
**(FOR Passenger Side 997 GT2/GT3 Seats)**


**INSTALLATION INSTRUCTIONS**

This mount has been designed to provide a mounting point for an anti-submarine strap in 997 GT2/GT3 bucket race seats.


Step 1: Remove the four floor pan bolts that secure the Passenger Seat to the car.

Step 2: Disconnect the yellow plug from underneath the seat as well as the black plug with the red lock tab, and remove the seating assembly from the car.


Step 3: Remove the two front bolts that attach the side mount brackets to the slider on either sides. Remove and set aside the machined chamfered washer from under the nut. This will be replaced by the sub strap mount.

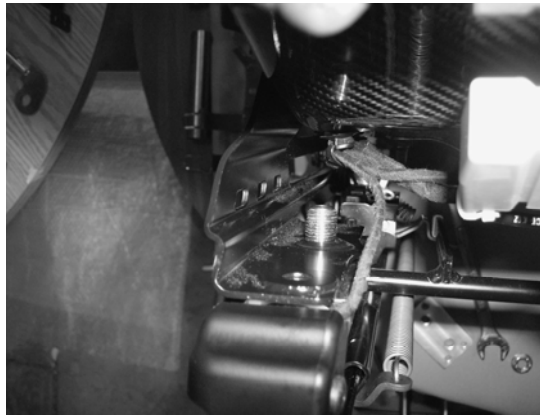

Step 4: Remove the three nuts that secure the black box to the under side of the seat. To do so, pull up the seat cushion to gain access to the Allen key bolt heads.

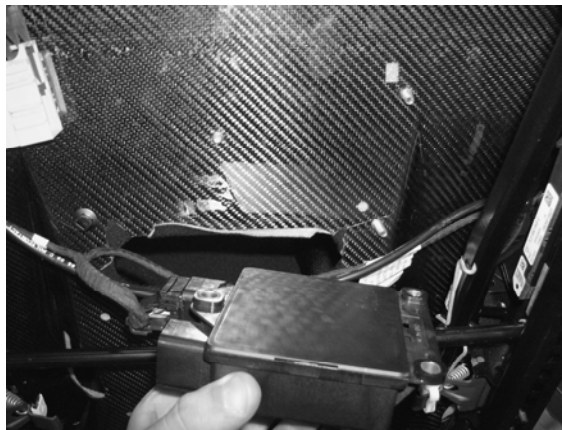

Step 5: Install the black box relocation tab on the lower most bolt, lightly tighten with it positioned towards the front of the seat.

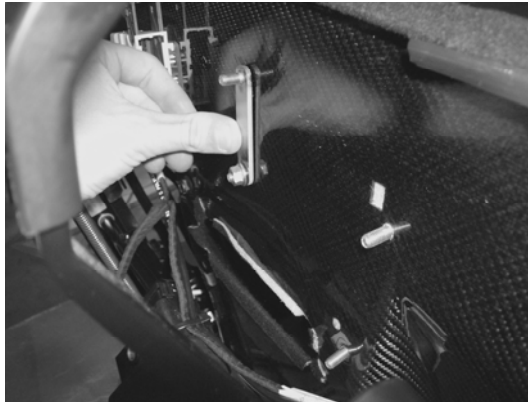

Step 6: Position the black box on the tab's stud and upper right most stud so that the box's orientation is like that shown below. Cutting of the one or more zip ties may be necessary. Tighten all three bolts, and tighten the supplied flange nut for the tab stud.



Step 7: Install the R-9034 over the slider studs with the countersink facing down and the harness loop facing forward.



Step 8: Installation of the sub strap can be done at this time, wrap around tube at the appropriate length and pass through the 3 pass lock tab (supplied by belt manufactures).

Step 9: Reinstall the seat and secure it with the factory floor pan bolts.

Performance driving events are by nature potentially hazardous to your health. Brey-Krause Mfg. Co. Inc. shall not be liable for injury, consequential, or other types of damages resulting from the use or misuse of our products. Proper installation of these parts is critical and should only be done by a professional shop.